



บริษัท สลิงออ่อน (ประเทศไทย) จำกัด SOFT-SLING (THAILAND) LIMITED


40/6-7 RAMKHAMHAENG RD., HUAMARK, BANGKAPI, BANGKOK 10240

TEL : (02) 3793840, 7316000-2


FAX : (02) 3793889

www.softsling.co.th , email : soft1@softsling.co.th

SPECIFICATION POLYESTER LASHING SYSTEMS



**BUCKLE SWEDEN
HEAVY DUTY**

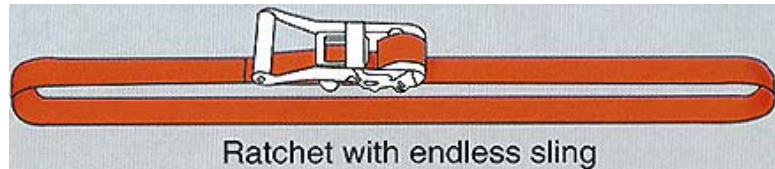

Ratchet with endless sling



Ratchet with double j hook




GALV. BUCKLE


1. PLEASE SPECIFY

- | | | |
|-------------------------------|----------------------------|-------------------|
| 1.1 CAPACITY 1,250/2,500 KG. | WIDTH 35 MM. - ORANGE | LENGTH _____ MTR. |
| 1.2 CAPACITY 1,500/3,000 KG. | WIDTH 35 MM. - BLUE | LENGTH _____ MTR. |
| 1.3 CAPACITY 2,000/4,000 KG. | WIDTH 50 MM. - YELLOW | LENGTH _____ MTR. |
| 1.4 CAPACITY 2,500/5,000 KG. | WIDTH 50 MM. - ORANGE/BLUE | LENGTH _____ MTR. |
| 1.5 CAPACITY 3,000/6,000 KG. | WIDTH 50 MM. - BLUE | LENGTH _____ MTR. |
| 1.6 CAPACITY 5,000/10,000 KG. | WIDTH 75 MM. - YELLOW | LENGTH _____ MTR. |


2. MATERIAL - POLYESTER 100 % RESISTANCE TO ACIDS, OIL, ROT, MILDEW, ULTRA-VIOLET
3. THE STRENGTH IS UNCHANGE IN WATER
4. WORKING TEMPERATURE APPR. 100°C / MEL TING POINT APPR. 260°C
5. STANDARD DIN 61360, CE STANDARD SHOW AT LABEL
6. LABEL SHOW - STRENGTH / DATED OF MANUFACTURE / MANUFACTURE'S NAME / LENGTH
7. CAPACITY AND LENGTH - TON / METRES "ON REQUEST"



Ratchet with delta link

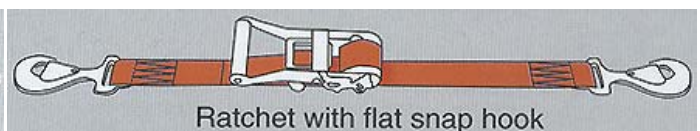

Ratchet with flat snap hook

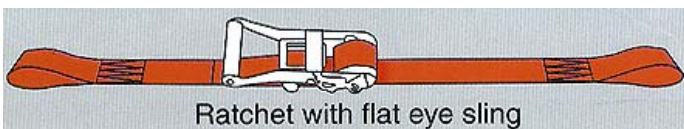

Ratchet with flat eye sling



Ratchet with half-twist eye sling



BREAKING STRENGTH : 2500 daN

LASHING STRENGTH : 5000 daN

NOT FOR LIFTING, ONLY LASHING



LENGTH: 10 MTRS



Made by:
Vojens Tovværk A/S

DK-6500 Vojens

Denmark

Distributed by:
Soft-Sling (Thailand) Ltd.
Telephone: 379-3840
379-3889
731-6000-2
Telefax : 379-3889