




บริษัท สลิงอ่อน (ประเทศไทย) จำกัด SOFT-SLING (THAILAND) LIMITED

40/6-7 RAMKUMHAENG RD., HUAMARK, BANGKAPI, BANGKOK 10240

TEL : (02) 3793840, 7316000-2

FAX : (02) 3793889

www.softsling.co.th email : soft1@softsling.co.th, soft2@softsling.co.th

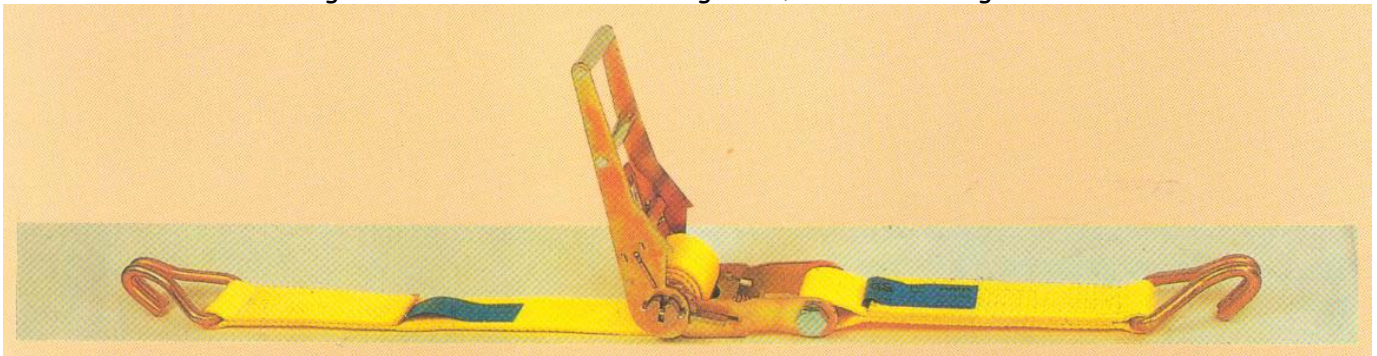

TECHNICAL DATA

MINIMUM BREAKING STRENGTH	WEBBING COLOUR WIDTH	MATERIAL OF WEBBING	MATERIAL RATCHET BUCKLE, HOOK, SNAP-HOOK, DELTA-RING
2,500 KG.	ORANGE : 35 MM.	POLYESTER	STELL WITH ZINC PLATED
4,000 KG.	YELLOW : 50 MM.	POLYESTER	STELL WITH ZINC PLATED
5,000 KG.	ORANGE : 50 MM.	POLYESTER	STELL WITH ZINC PLATED
6,000 KG.	BLUE : 50 MM.	POLYESTER	STELL WITH ZINC PLATED
10,000 KG.	YELLOW : 75 MM.	POLYESTER	STELL WITH ZINC PLATED
11,000 KG.	ORANGE : 100 MM.	POLYESTER	STELL WITH ZINC PLATED

LASHING SYSTEMS

THE BEST WAY TO STRAP YOUR CARGO

- : LIGHT WEIGHT
- : SOFT, EASY TO HANDLE
- : PROTECT LOADS FROM DAMAGE AND SCRATCHING
- : LESS PRESSURE AT THE POINT OF CONTACT ON LOAD
- : NO JURRY TO HANDS OR CLOTHING
- : TIGHT YET GENTLE GRIP

SPECIFICATION

- : BRAND "VT-LOFT" MADE IN DENMARK
- : MATERIAL - POLYESTER 100 % RESISTANCE TO ACIDS, OIL, ROT MILDEW, ULTRA-VIOLET
- : THE STRENGTH IS UNCHANGE IN WATER
- : WORKING TEMPERATURE APPR. 100°C / MEL TING POINT APPR. 260°C
- : BLUE LABLE SHOW - STRENGTH / DATED OF MANUFACTURE / MANUFACTURE'S NAME / LENGTH / CE STANDARD
- : TEST CERTIFICATE
- : INSTRUCTION MANUAL
- : POLYESTER WEBBING WIDTH OF 100 MM. / 75 MM. / 50 MM. / 35 MM.
- : CAPACITY AND LENGTH - TON / METRES "ON REQUEST"



BLUE BUCKLE



ZINC BUCKLE



YELLOW BUCKLE
"HEAVY DUTY"



LASHING SYSTEMS